


Counterweight sleeve

Component of the attachment devices Cantilever arms type AASS 1 to 3 and ASS 1 to 3 according to EN 795:2012 and CEN/TS 16415:2017

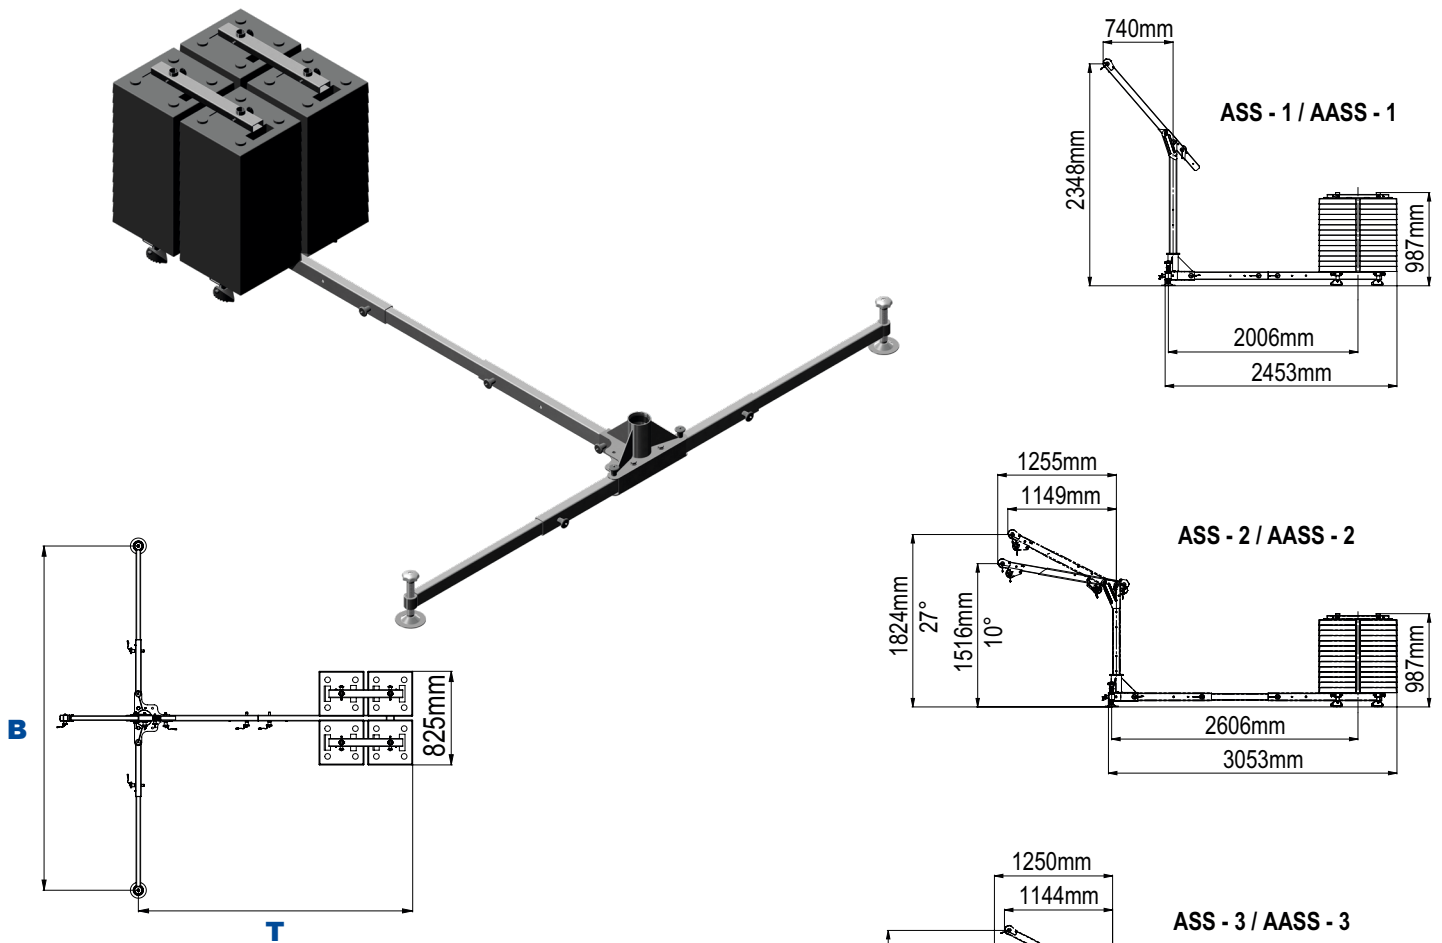

Product information:

Order-No.	Width (B)	Depth min. (T)	Depth max. (T)	Weight without Counterweight
41-68	3035 mm	2419 mm	3017 mm	136 kg

Features:

Counterweight sleeve for IKAR cantilever arms as a complete system

- Completely made of stainless steel.
- Approved for 2 persons.
- Swiveling and adjustable in case of a lack of headroom.
- Ideal for work areas where frequent movement and /Reduction.
- Min. required counterweights: maximum 560 kg .
- No single component heavier than 25 kg.
- Compatible with IKAR cantilever arms ASS-1 to ASS-3 and AASS-1 to AASS-3 (The boom needs to be purchased separately).
- The swivel range of the cantilever arm is 360° with one maximum load of 300 kg.