


Lower Ground Sleeve Core Hole

Component of the attachment devices typ AASS 1 - 4 and ASS 1 - 4
according to EN 795:2012 und CEN/TS 16415:2017

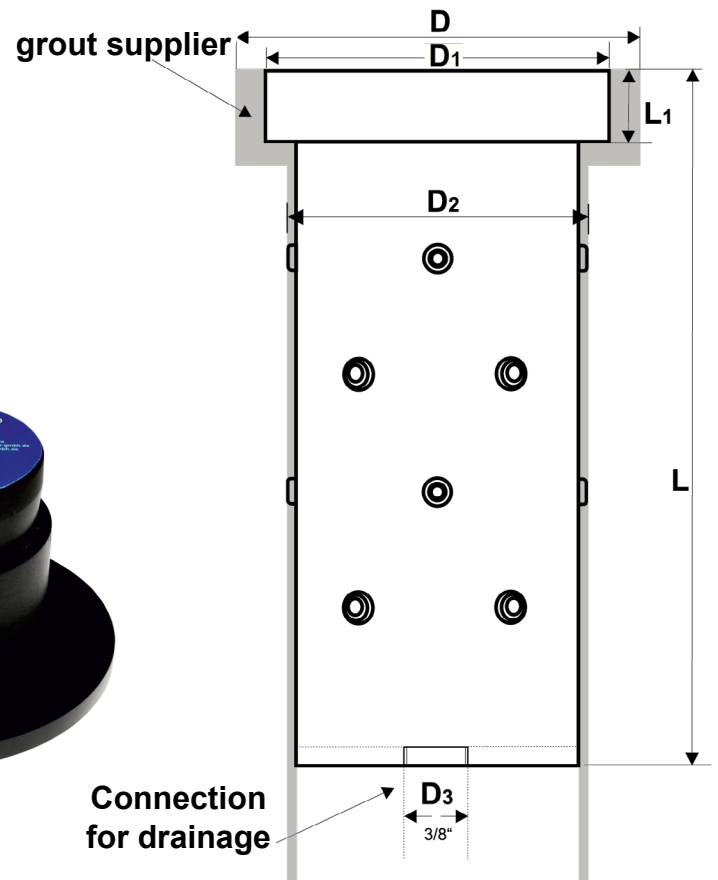

Drawings not true to scale

Order No:	Length (L)	Length (L1)	Width (D)	Width (D1)	Width (D2)	Width (D3)	Weight
41-57/5V4	297 mm	32 mm	Ø 160 mm	Ø 148 mm	Ø 120 mm	3/8"	12 kg
41-57/7	94 mm		Ø 140 mm				

Features:

Lower ground sleeve including cover flap

- Lower ground sleeve as retrofitting in concrete floors, fastening by means of special concrete potting compound.
- Stainless steel 1.4571 (V4A) .
- 3/8" Connection for drainage.
- Rotary bearing made of resistant PA (polyamide).
- The existing component must withstand the forces occurring in the event of a fall. This test is to be carried out by an architect or statics specialist.
- Tight, dust- and splash-proof protective cover (Order No.: 41-57/7) (clamp construction) made of PA (Polyamid) can be operated with a special key and with IKAR floor and wall sleeves for Cantilever arms type AASS 1 - 4 and ASS 1 - 4 compatible.

The assembly instructions for the ground sleeve must be observed.