

Flexible HWB 1,8

according to EN 360:2002, DIN 19427:2017




IKV 11 (EN 362:2004-T)



The Retractable Type Fall Arrester is tested and certified for the protection in mobile elevated working platforms.



IKAR retractable type fall arrester have been successfully tested in a simulated fall trial over and edge according to CNB/P/11.060 ($r \geq 0,5 \text{ mm}$).

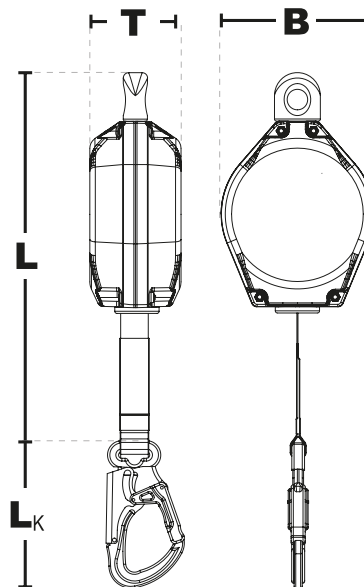

Explanations of the device names:

- H** = Retractable type fall arrester
- W** = Swivel attachment point
- S** = Steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Insert length of the device

Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K) IKV 11
41-HWB 1,8	1,8 m	Aluminium	0,7 kg	237 x 78 x 60 mm	136,5 mm

Features

Retractable type fall arrester with internal energy absorber.

- Sturdy and low-maintenance retractable type fall arrester.
- Robust aluminum housing with a rotational attachment eye.
- The rotational attachment eye prevents the webbing from twisting.
- Lifeline made of Dyneema® webbing. The lifeline is tested over a double sharp edge.
- Standard connector IKV 11.
- Impact force less than 3 kN
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Lifespan: approx 10 years