



Flexible HWS 4,5

according to EN 360:2002

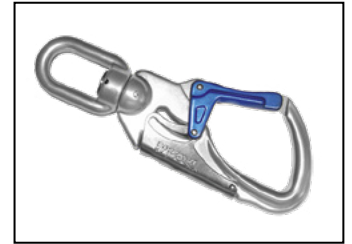

IKV 21 (EN 362:2004-T)
with fall indicator

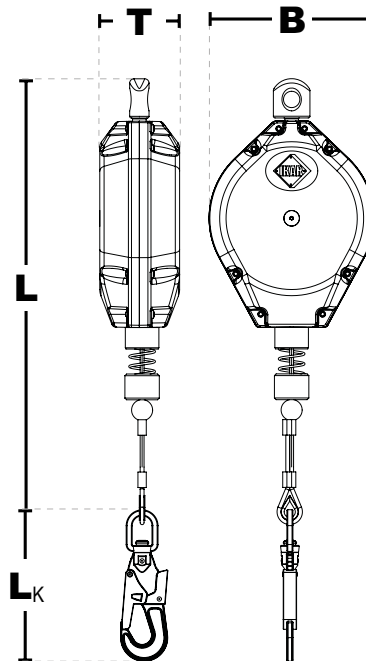

Explanations of the device names:

- H** = Retractable type fall arrester
- W** = Swivel attachment point
- S** = Steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Operational length of the device



IKAR retractable type fall arrester have been successfully tested in a simulated fall trial over and edge according to CNB/P/11.060 ($r \geq 0,5 \text{ mm}$).

Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L_K) IKV 21
41-HWS 4,5	4,5 m	Aluminium	2,5 kg	385 x 128 x 80 mm	185,5 mm

Features

Retractable type fall arrester with internal energy absorber.

- Sturdy and low-maintenance retractable type fall arrester.
- Robust aluminum housing with a rotational attachment eye.
- The rotational attachment eye prevents the galvanized steel lifeline from twisting.
- Lifeline made of galvanized steel $\varnothing 4,8 \text{ mm}$.
- Standard connector IKV 21 with swivel attachment, which prevents twisting of the galvanized steel lifeline.
- Nominal load: 136 kg
- Temperature range of application: -40°C bis $+50^\circ\text{C}$
- Lifespan: approx 10 years