

## Flexible HWS 12


according to FprEN360:2022



IKAR retractable type fall arrester have been successfully tested in a simulated fall trial over and edge according to FprEN360:2022 ( $r \geq 0,5 \text{ mm}$ ).



IKV 21 (EN 362:2004-T)  
with fall indicator

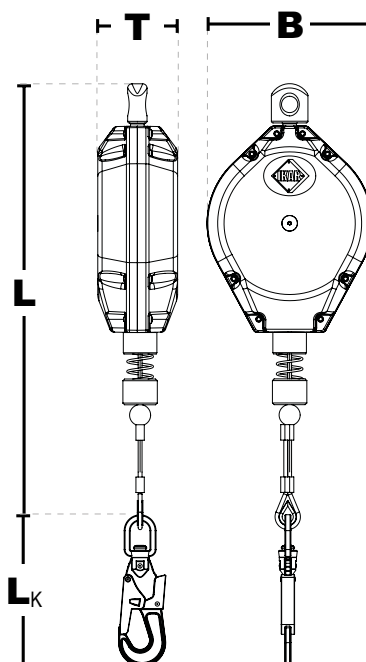

### Explanations of the device names:

- H** = Retractable type fall arrester
- W** = Swivel attachment point
- S** = Steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Operational length of the device

## Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L <sub>K</sub> ) IKV 21
41-HWS 12	12,0 m	Aluminium	5,3 kg	475 x 198 x 98 mm	185,5 mm

## Features

### Retractable type fall arrester with internal energy absorber.

- Sturdy and low-maintenance retractable type fall arrester.
- Robust aluminum housing with a rotational attachment eye.
- The rotational attachment eye prevents the galvanized steel lifeline from twisting.
- Lifeline made of galvanized steel  $\varnothing 4,8 \text{ mm}$ .
- Standard connector IKV 21 with swivel attachment, which prevents twisting of the galvanized steel lifeline.
- Nominal load: 136 kg
- Temperature range of application:  $-40^{\circ}\text{C}$  bis  $+50^{\circ}\text{C}$
- Lifespan: approx 10 years