



Robusto HPS 18

according to EN 360:2002, ANSI Z359.14-2014



IKV 21 (EN 362:2004-T)
with fall indicator

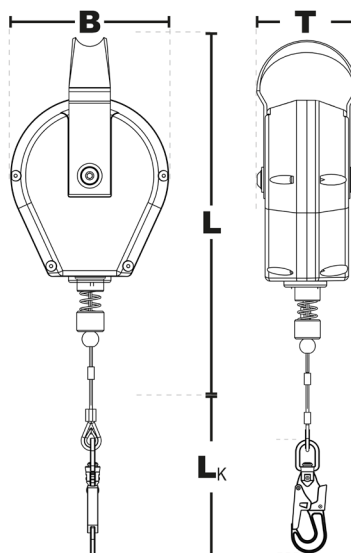

IKV 33 (ANSI Z.359.1-2007; CSA
Z259.12-2011) with fall indicator



IKAR height safety devices have been successfully tested in a simulated fall trial over and edge
ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$) and
CNB/P/11.060 ($r \geq 0,5 \text{ mm}$)

Explanation for the device names:

H = Height Safety Device
S = Galvanized steel lifeline
B = Webbing lifeline
P = Plastic housing
Number = Insert length of the device

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K)	
					IKV 21	IKV 33
41-HPS 18	18 m	Plastic	6,7 kg	540 x 225 x 96 mm	186 mm	196mm

Features:

Height safety device with internal energy absorber

- Resistant and low-maintenance height safety device with handle anchor attachment point
- Robust, seawater-resistant aluminium housing with a galvanized steel cable
- Ø 4,8 mm lifeline
- Standard connector IKV 21
- **or**
- IKV 33
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years