




Robusto H 24

according to EN 360:2002, ANSI Z359.14-2014

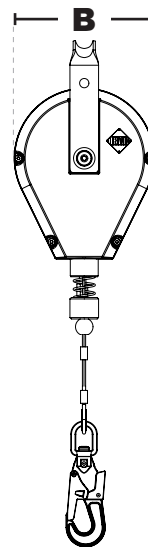

IKV 21 (EN 362:2004-T)
with fall indicator

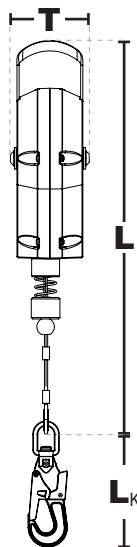

IKV 23 (ANSI Z.359.1-2007; CSA
Z259.12-2011) with fall indicator



IKAR height safety devices have been successfully tested in a simulated fall trial over and edge
ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$) and
CNB/P/11.060 ($r \geq 0,5 \text{ mm}$).

Explanation for the device names:

H = Height Safety Device
S = Galvanized steel lifeline
B = Webbing lifeline
P = Plastic housing
Number = Insert length of the device

Product information:

Order No:	Application length	Housing	Weight	Abmessungen (LxBxT)	Connector(L _K)	
					IKV 21	IKV 33
41-H 24	24 m	Aluminium	13,5 kg	630 x 275 x 110 mm	186 mm	196 mm

Features:

Height safety device with internal energy absorber

- Resistant and low-maintenance high safety device with handle anchor attachment point
- Robust, seawater-resistant aluminium housing with a steel cable Ø 4,8 mm lifeline
- Standard connector IKV 21
or
- IKV 33
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years