




Robusto H 42

according to EN 360:2002, ANSI Z359.14-2014

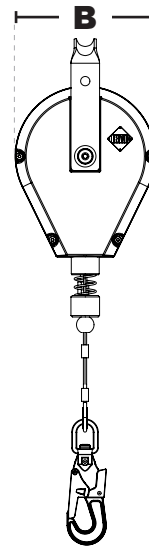

IKV 21 (EN 362:2004-T)
with fall indicator

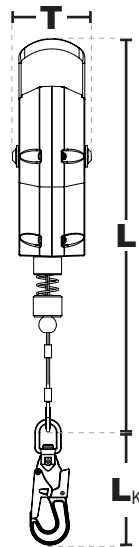

IKV 23 (ANSI Z.359.1-2007; CSA
Z259.12-2011) with fall indicator

Explanation for the device names:

- H** = Height Safety Device
- S** = Galvanized steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Insert length of the device

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K)	
					IKV 21	IKV 33
41-H 42	42 m	Aluminium	27,2 kg	750 x 370 x 120 mm	186 mm	196 mm

Features:

Height safety device with internal energy absorber

- Resistant and low-maintenance height safety device with handle anchor attachment point
- Robust, seawater-resistant aluminium housing with a galvanized steel cable
Ø 4,8 mm lifeline
- Standard connector IKV 21
or
- IKV 33
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years