

HRA 33 E


according to EN 360:2002, EN 1496:2017, ANSI Z359.14-2014



IKV 21 (EN 362:2004-T)
with fall indicator



IKV 33 (ANSI Z.359.1-2007;
CSA Z259.12-2011)
with fall indicator

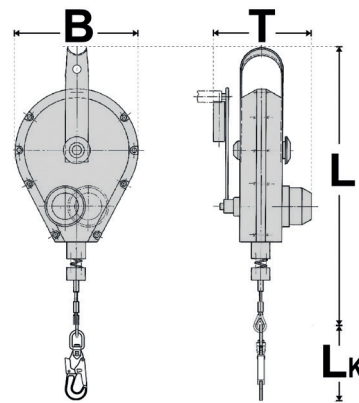

Explanation for the device names:

- H** = Height Safety Device
- R** = Rescue hoisting device
- S** = Let-down function
- P** = Plastic housing
- Number** = Insert length of the device

Product information:

| Order No: | Application length | Housing | Weight | Dimensions (LxBxT) | Connector (L _K) | |
|-------------|--------------------|----------|--------|--------------------|-----------------------------|--------|
| | | | | | IKV 21 | IKV 33 |
| 41-HRA 33 E | 30 m | Aluminum | 17 kg | 640 x 315 x 230 mm | 186 mm | 196 mm |

Features:

Height safety devices with rescue hoisting facility and internal energy absorbing

- Resistant and low-maintenance high safety device with rescue hoisting facility and handle
- Robust, seawater-resistant aluminum housing with retractable lifeline made from stainless steel rope Ø 4,8 mm
- Standard connector IKV 21, swiveling
or IKV 33
- Rescue hoisting facility with integrated damping function according to EN 1496: 2017, which is in the case of rescue by a second person
- Completely enclosed unit with parts made of stainless steel, sea water resistant aluminum or impact resistant plastic
- Crankshaft diameter: Ø = 550 mm
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Life service: approx 10 years

Use only in combination with IKAR brackets!