


Dried DB-AB-A3

accreditation: EN ISO 9001:2015, CEI-UNI TS 16415:2017

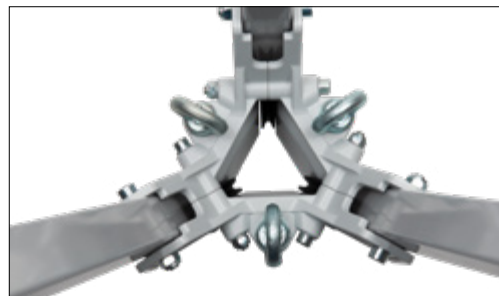

Order No.:	Mounting diameter	Heigth	Transport length	Weigth
41-49	Ø 645 mm bis Ø 2207 mm	1480 mm bis 2554 mm	1611 mm	24 kg
40-58	OPTIONAL: Tripod Carrying and Protection Bag			
41 - xx	OPTIONAL: HRA retractable type fall arrester with rescue hoisting facility up to 40 m			
41-54/DWS	OPTIONAL: erhältlich: Schnellwechselhalterung für Lastwinde			
41-IKLW 300	OPTIONAL: IKAR Load winch for loads up to 300 kg with a maximum rope length of 20 m			
41 - PLW-DA	OPTIONAL: IKAR Personnel and load winch			

Eigenusebarten:

- [illegible]

The assembly instructions for the tripod must be observed.


DB-A3 Dimensions

Transport length

1611mm

ø Transport

374 mm



Stellung 1

Heigth min.

1590 mm

ø min



645 mm

Heigth max.

2594 mm

ø max

1010 mm

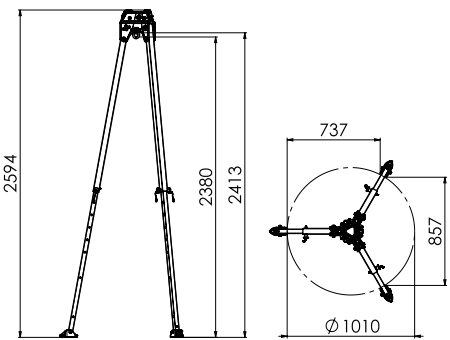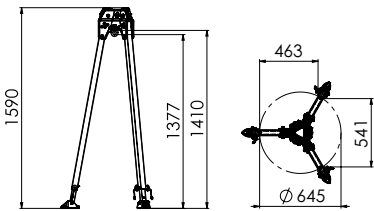

Stellung 2

Heigth min.

1552 mm

ø min



958 mm

Heigth max.

2526 mm

ø max

1561 mm

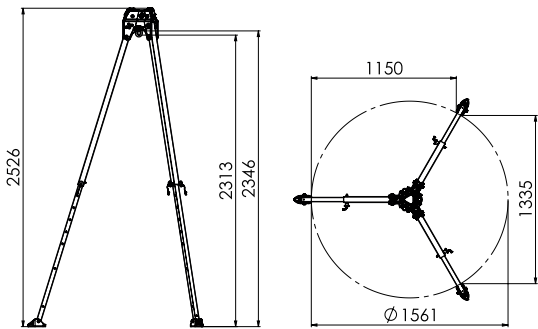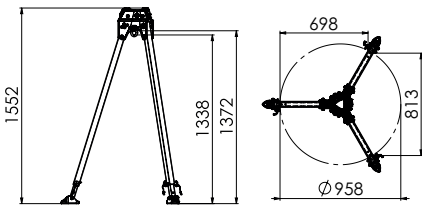

Stellung 3

Heigth min.

1480 mm

ø min



1326 mm

Heigth max.

2400 mm

ø max

2207 mm

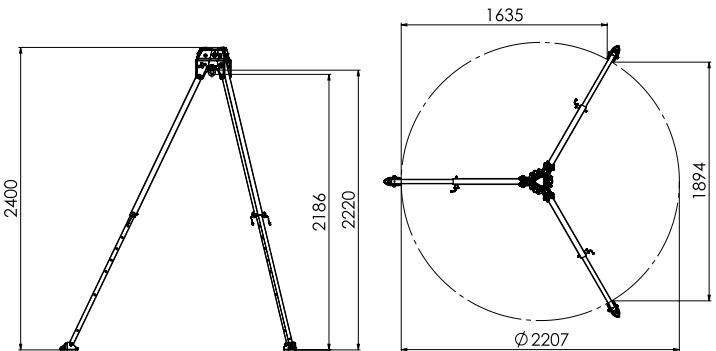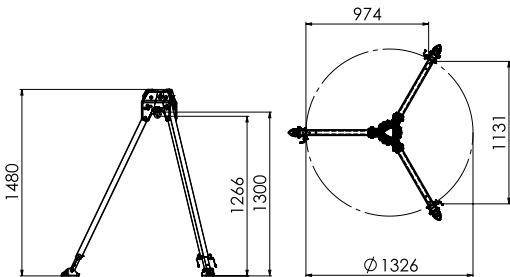

Unit: Maßangaben in mm
(Drawings not to scale)