


## Tripod DB-A3 XL

according to EN 795:2012 Typ B und CEN/TS 16415:2017

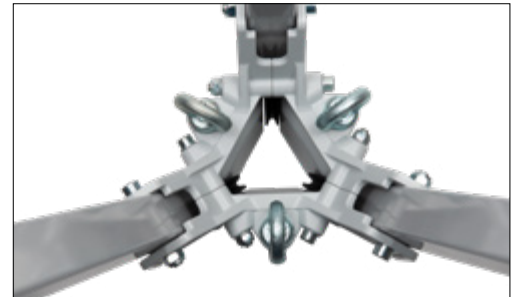

| Order No.:  | Mounting diameter                                                                              | Height             | Transport length | Weight |
|-------------|------------------------------------------------------------------------------------------------|--------------------|------------------|--------|
| 41-49       | Ø 823 mm to Ø 2896 mm                                                                          | 1928 mm to 3378 mm | 2108 mm          | 30 kg  |
| 40-58       | <b>OPTIONAL:</b> Tripod Carrying and Protection Bag                                            |                    |                  |        |
| 41 - xx     | <b>OPTIONAL:</b> HRA retractable type fall arrester with rescue hoisting facility s up to 40 m |                    |                  |        |
| 41-54/DWS   | <b>OPTIONAL:</b> erhältlich: Schnellwechselhalterung für Lastwinde                             |                    |                  |        |
| 41-IKLW 300 | <b>OPTIONAL:</b> IKAR Load winch for loads up to 300 kg with a maximum rope length of 20 m     |                    |                  |        |
| 41 - PLW-DA | <b>OPTIONAL:</b> IKAR Personnel and load winch                                                 |                    |                  |        |

### Features:

- Lightweight, height adjustable aluminum tripod
- Load capacity 300 kg
- Extendable legs can be folded out to 3 angle positions
- 3 integral deflection rollers für steel ropes with Ø 4,8 - 6 mm
- 3 attachment points
- Corrosion-resistant coating
- Attachment points for up to 2 people
- equipped with foldable rubber feet
- Applicable with IKAR-retractable type fall arrester with rescue hoisting facility (Type HRA) up to 40m
- **OPTIONAL:** Tripod Carrying and Protection Bag
- **OPTIONAL:** HRA retractable type fall arrester with rescue hoisting facility up to 40 m
- **OPTIONAL:** Schnellwechselhalterung für Lastwinde
- **OPTIONAL:** IKAR Load winch for loads up to 300 kg with a maximum rope length of 20 m
- **OPTIONAL:** IKAR Personnel and load winch

The assembly instructions for the tripods must be observed.


# DB-A3 XL Dimensions

Transport length

2108 mm



ø Transport

348 mm





## Position 1

|             |         |       |        |             |         |       |         |
|-------------|---------|-------|--------|-------------|---------|-------|---------|
| Heigth min. | 2079 mm | ø min | 823 mm | Heigth max. | 3378 mm | ø max | 1295 mm |
|-------------|---------|-------|--------|-------------|---------|-------|---------|

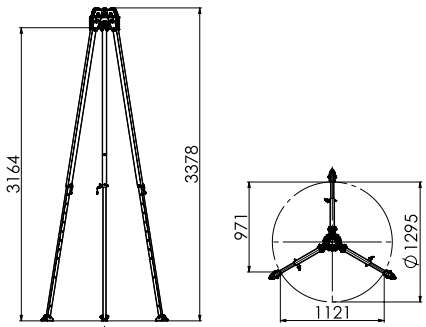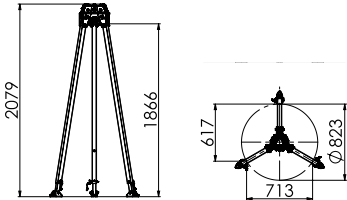



## Position 2

|             |         |       |         |             |         |       |         |
|-------------|---------|-------|---------|-------------|---------|-------|---------|
| Heigth min. | 2027 mm | ø min | 1252 mm | Heigth max. | 3288 mm | ø max | 2032 mm |
|-------------|---------|-------|---------|-------------|---------|-------|---------|

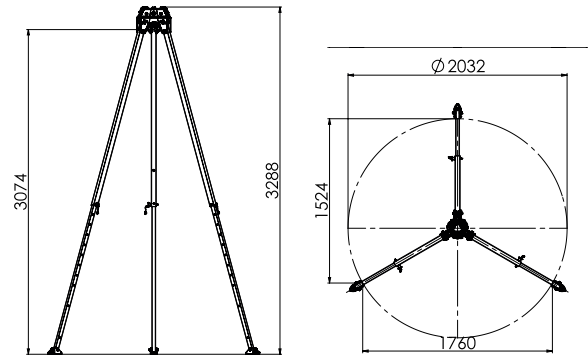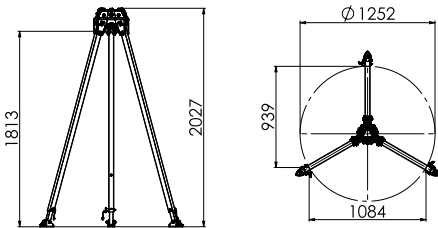

## Position 3

|             |         |       |         |             |         |       |         |
|-------------|---------|-------|---------|-------------|---------|-------|---------|
| Heigth min. | 1928 mm | ø min | 1755 mm | Heigth max. | 3119 mm | ø max | 2896 mm |
|-------------|---------|-------|---------|-------------|---------|-------|---------|

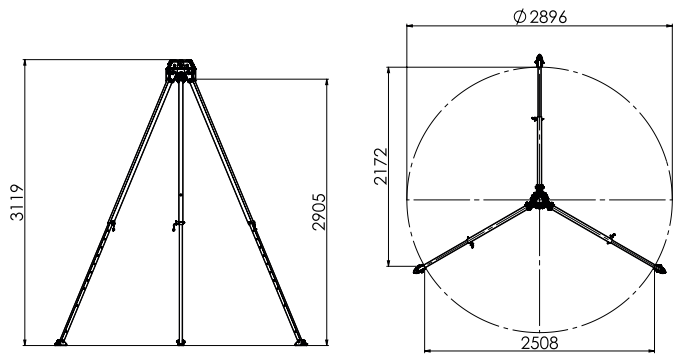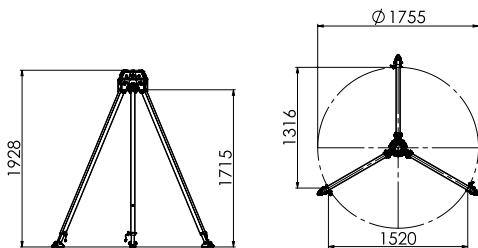

Unit of measurement in drawings in mm  
(Drawings not true to scale)