



Webbing Energy Absorbing Y Lanyard

according to EN 355:2002

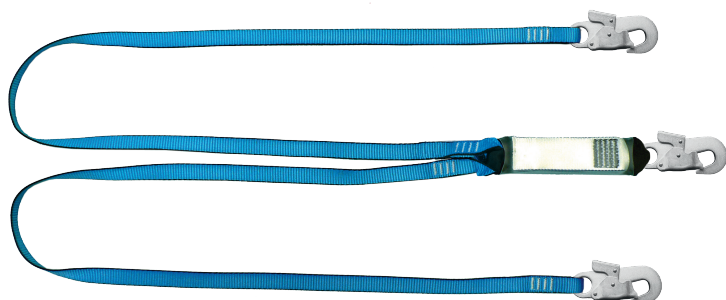

IKV 06 (EN 362:2004)

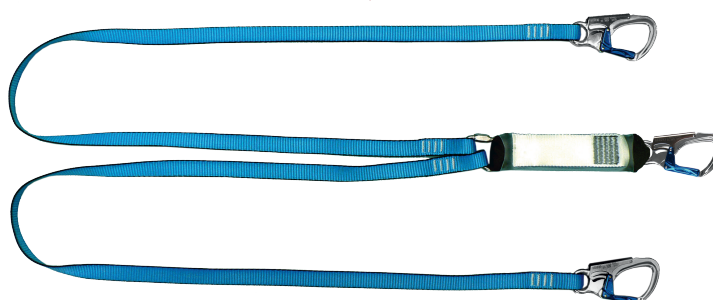

IKV 11 (EN 362:2004)



These IKAR fasteners have been successful in horizontal application testing
CNB 11.060 2008 sharp edge typ A ($r \geq 0,5 \text{ mm}$)

Product information:

Order No.:	Length	Connection element	Opening gate (Carabiner)	Weight
45-IK 6 F B 100 Y 6	1,00 m	IKV 06	18 mm	1,01 kg
45-IK 6 F B 150 Y 6	1,50 m	IKV 06	18 mm	1,07 kg
45-IK 6 F B 175 Y 6	1,75 m	IKV 06	18 mm	1,10 kg
45-IK 6 F B 200 Y 6	2,00 m	IKV 06	18 mm	1,13 kg
45-IK 2 F B 100 Y 2	1,00 m	IKV 11	26 mm	0,68 kg
45-IK 2 F B 150 Y 2	1,50 m	IKV 11	26 mm	0,74 kg
45-IK 2 F B 175 Y 2	1,75 m	IKV 11	26 mm	0,77 kg
45-IK 2 F B 200 Y 2	2,00 m	IKV 11	26 mm	0,80 kg

Features:

Webbing energy absorbing lanyard

- 25 mm wide webbing made of polyester (abrasion resistant, dimensionally stable, light and weather resistant)
- webbing energy absorbing on webbing strap
- Aluminum double action hook IKV 11 (EN 362:2004) at the end and at the webbing energy absorbing
- or:**
- Steel double action hook IKV 06 (EN 362:2004) at the end and at the webbing energy absorbing

Applikation:

For use in fall arrest systems

Areas of use:

Industrial, construction and utility environments