


Load arrester HWB 3,5 L/150

according to directive RL 2006 / 42 / EC

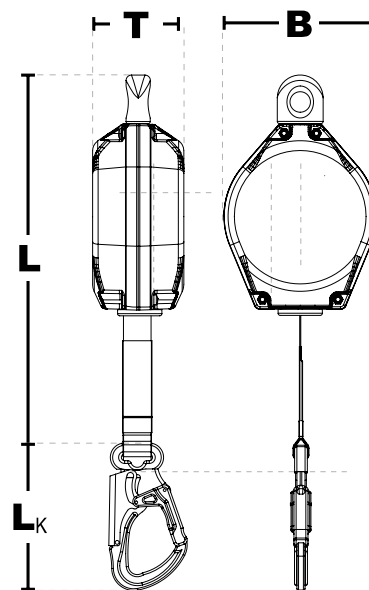

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Capacity
41-HWB 3,5 L 150	3,50 m	Aluminium	1,0 kg	287 x 108 x 81 mm	max. 150 kg

Features:

Load arrester with internal energy absorber

- Sturdy and low-maintenance load arrester.
- Robust aluminum housing with a rotational attachment eye.
- Lanyard made of Dyneema® webbing.
- The rotational attachment eyelet (Ø 20mm) prevents the webbing from twisting.
- Sling diameter: 15 mm
- Requirement for the anchorage point: 30 kN
- Arresting force: 6 kN
- Catchment distance: 300 mm
- Extraction speed: 10,5 m/min
- Release speed: 12 m/min
- Securing load: 150 kg
- Temperature range of application: -40°C bis +50°C
- Lifeline: approx 10 years