


Load arrester HWPS 12 L/250/9

according to directive RL 2006 / 42 / EC

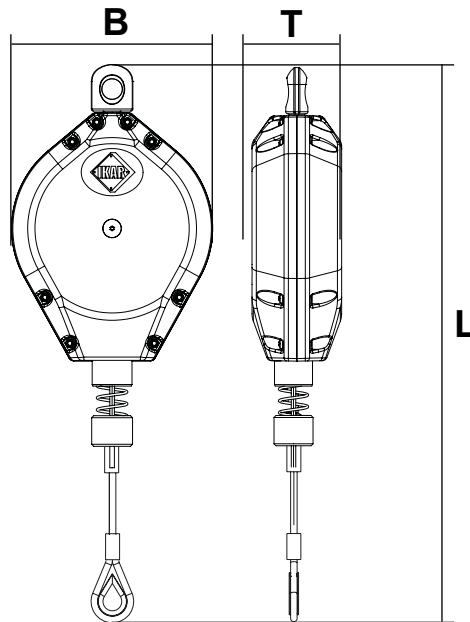

Explanation of the

Device Label:

- H = Retractable Type Fall Arrester
- P = Plastic housing
- S = galvanized steel cable
- L = Load arrester
- B = Webbing

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Capacity
41-HWPS 12 L/250/9	9 m	Plastic	4,9 kg	473 x 200 x 99 mm	max. 250 kg

Features:

Load arrester with internal energy absorber

- Resistant and low-maintenance load arrester with rotational attachment eye.
- Robust plastic housing with a galvanized steel cable Ø 4,8 mm lanyard.
- The rotational attachment eyelet (Ø 20mm) prevents the steelrope from twisting
- Eyelet diameter diameter: 15 mm
- Requirement for the anchorage point: 50 kN
- Arresting force: 6 kN
- Catchment distance: 300 mm
- Extraction speed: 10,5 m/min
- Release speed: 12 m/min
- Securing load: 250 kg
- Temperature range of application: -40°C bis +50°C
- Lifeline: approx 10 years