


Load arrester HPS 18 L/300/16

according to directive RL 2006 / 42 / EG

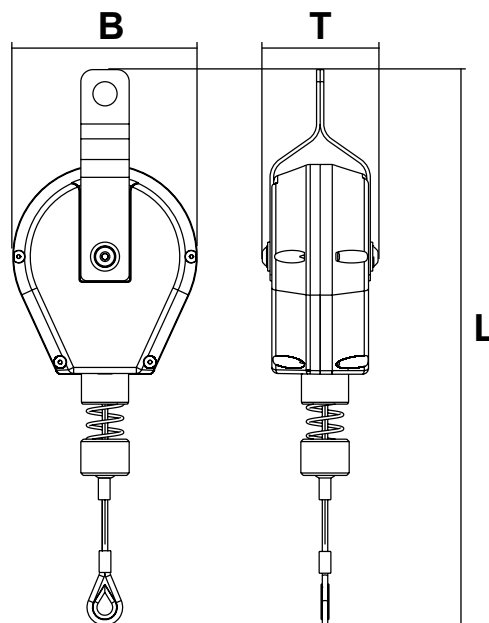

Explanation of the

Device Label:

- H = Retractable Type Fall Arrester
- P = Plastic housing
- S = galvanized steel cable
- L = Load arrester
- B = Webbing

Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Nominal Load
41-HPS 18 L/300/16	16 m	Plastic	6,7 kg	540 x 225 x 96mm	max. 300 kg

Features:

Load arrester with internal energy absorber

- Resistant and low-maintenance load arrester with handle anchor attachment point
- Robust plastic housing with a galvanized steel cable Ø 4,8 mm lifeline
- Bracket suspension with Ø 19.5 mm hole, particularly robust for secure attachment of the load securing device.
- Eyelet diameter: 15 mm
- Requirement for the anchorage point: 50 kN
- Arresting force: 10 kN
- Catchment distance: 300 mm
- Extraction speed: 10,5 m/min
- Release speed: 12 m/min
- Securing load: max. 300 kg
- Temperature range of application: -40°C bis +50°C
- Lifeline: approx 10 years