
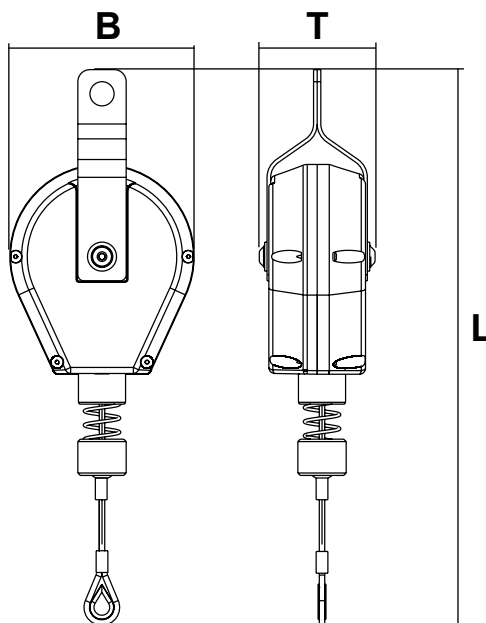


## Load arrester HL 30/1000

according to directive RL 2006/42/EG

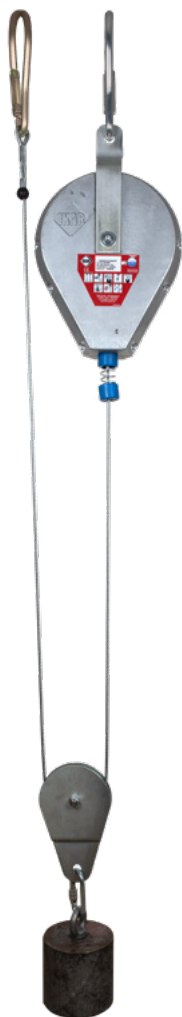

### Explanation of the

#### Device Label:

- H = Retractable Type Fall Arrester
- P = Plastic housing
- S = galvanized steel cable
- L = Load arrester
- B = Webbing

## Product information:

Order No.:	Application length	Housing	Weight	Dimensions (LxBxT)	Nominal Load
41-HL 30/1000	6 m	Aluminium	18,0 kg	640 x 320 x 120 mm	max. 1000 kg

## Features:

### Load arrester with internal energy absorber

- Resistant and low-maintenance load arrester with handle anchor attachment point
- Robust, seawater-resistant aluminium housing with retractable lanyard made of galvanised steel cable Ø 6 mm
- Bracket suspension with Ø 19.5 mm bore, particularly robust for safe attachment of the load arrester
- Eyelet diameter diameter: 15 mm
- Requirement for the anchorage point: 25 kN + 25 kN
- Arresting force: 10 kN
- Catchment distance: 400 mm
- Extraction speed: 10,5 m/min
- Release speed: 12 m/min
- Securing load: max. 1000 kg
- Temperature range of application: -40°C bis +50°C
- Lifeline: approx 10 years