


Carabiner Hook IKV 30

according to EN 362:2004

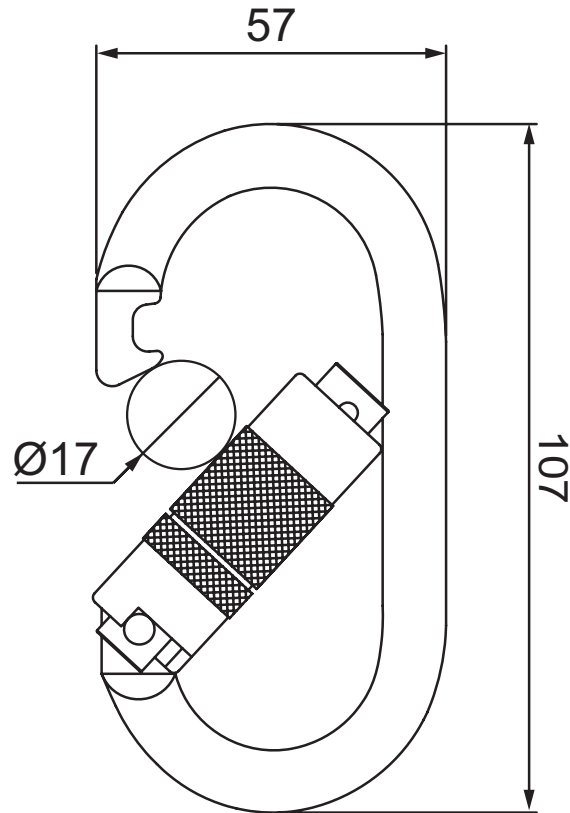

Product information:

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
4000000030	Steel	57 x 107 mm	Ø 17 mm	25 kN	196 g

Features:

Basic connector (class B)

- Self-closing connector intended to be used as a component of a personal fall protection system.
- Galvanized steel
- Triple lock: It requires three independent movements to open it. The locking sleeve is first pushed upwards along the locking axis, then turned through 90° to be able to be opened.
- Temperature range of application: -40°C bis +50°C

Use:

IKAR fall arresters on swivel (flexible)