


Carabiner hook IKV 36

according to EN 362:2004

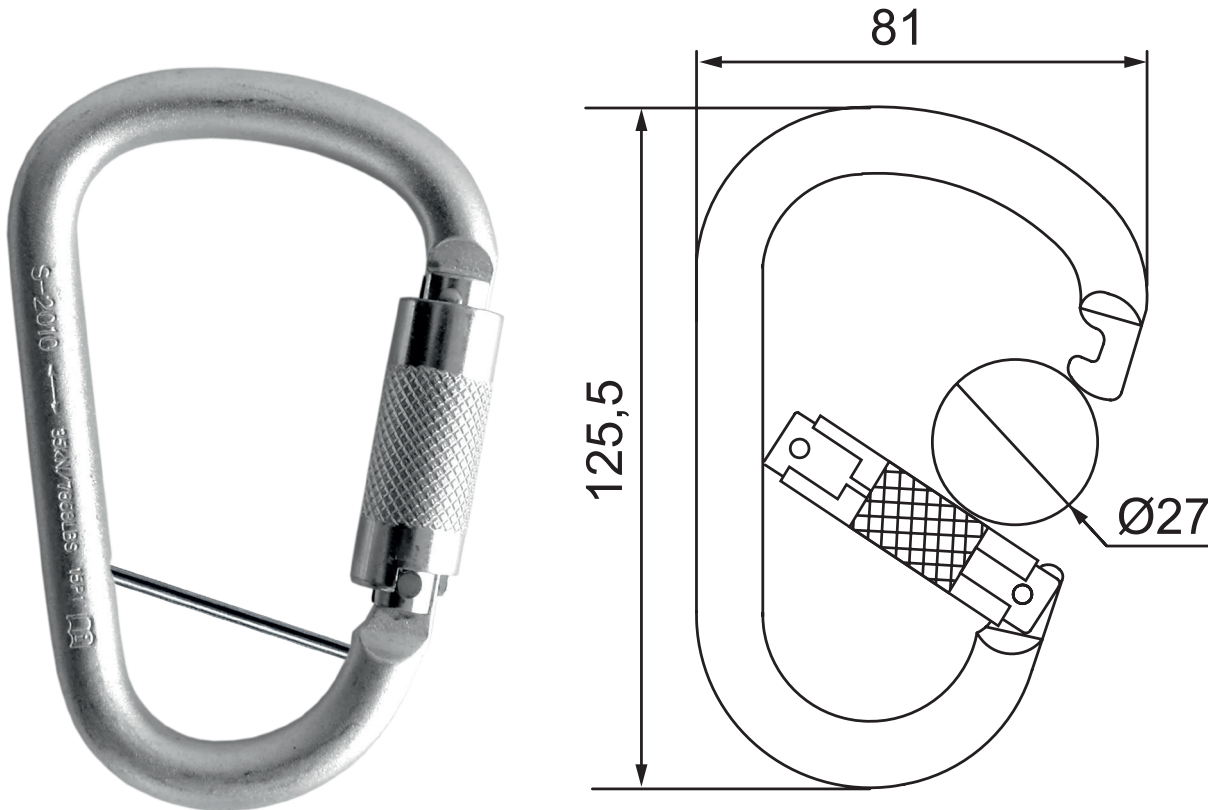

Product information:

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
4000000036	Steel	81 x 125,5 mm	27 Ø mm	35 kN	294 g

Features:

Basic connector (class B)

- Self-closing connector intended to be used as a component of a personal fall protection system.
- Galvanized steel
- Twist lock: The twist lock is an autolock system. Closed snapper moves the sleeve into a position which locks the latch. However, it is enough, a quarter turn and the lock is unlocked.
- Temperature range of application: -40°C bis +50°C

Use:

IKAR fall arresters on swivel (flexible)