


## Carabiner Hook IKV 47

according to EN362:2004, ANSI Z359.12-2019; CSA Z259.12-16

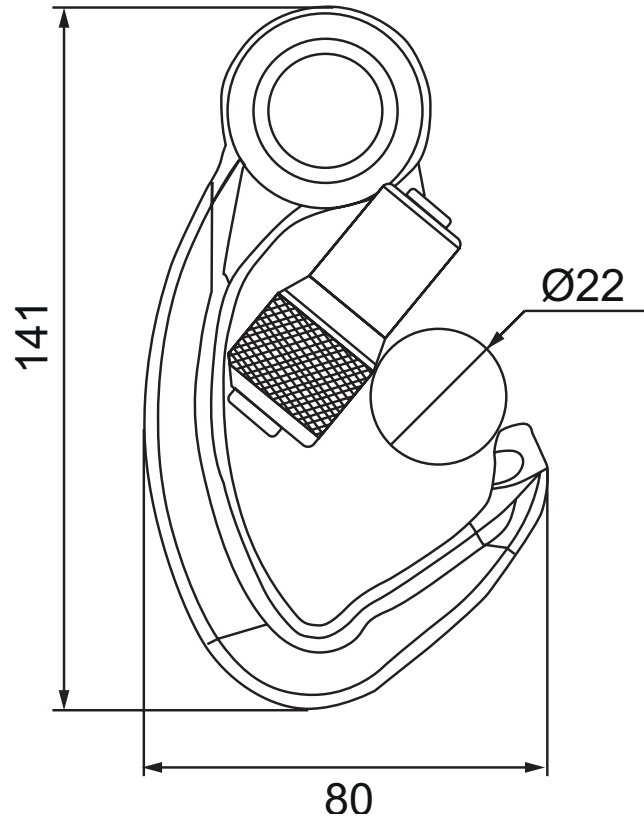

### Product information:

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
4000000047	Aluminium	80 x 141 mm	Ø 22 mm	30 kN	149 g

### Features:

#### Termination connector (class T)

- Self-closing connector designed to allow the fixing as an element of a sub-system in such a way that the loading is in a predetermined direction.
- Resistant aluminum alloy, anodized
- Triple lock: It requires three independent movements to open it. The locking sleeve is first pushed upwards along the locking axis, then turned through 90° to be able to be opened.
- Temperature range of application: -40°C bis +50°C

#### Use:

Retractable lanyards