


Carabiner hook IKV 54

according to EN362:2004, ANSI Z359.12-2019; CSA Z259.12-16

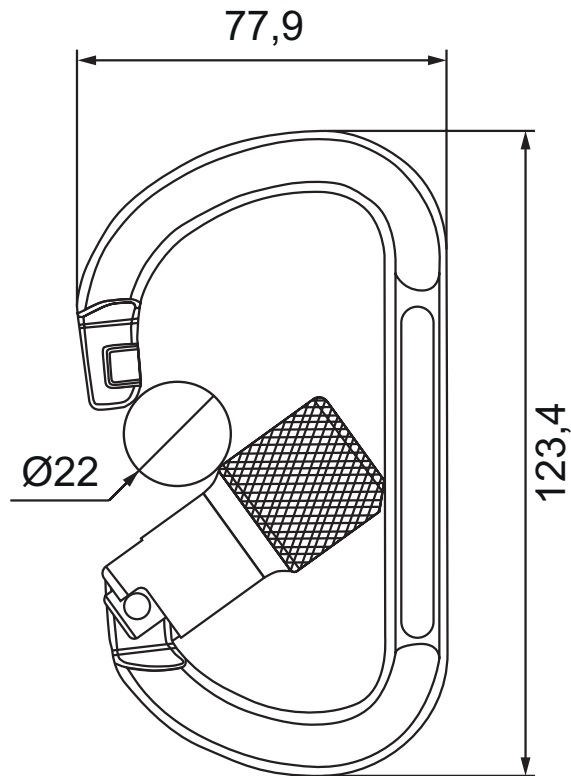

Product information:

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
4000000054	Aluminium	77,9 x 123,4 mm	22 Ø mm	24 kN	147 g

Features:

Basic connector (class B)

- Self-closing connector intended to be used as a component of a personal fall protection system.
- Resistant aluminum alloy, anodized
- Triple lock: It requires three independent movements to open it. The locking sleeve is first pushed upwards along the locking axis, then turned through 90° to be able to be opened.
- Temperature range of application: -40°C bis +50°C

Use:

IKAR fall arresters on swivel (flexible)