
Datasheet



Double action Hook IKV 06

according to EN 362:2004



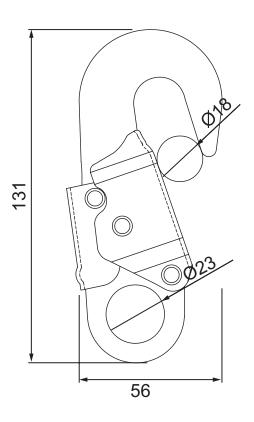

Product information:

| Order No: | Material | Connector (BxH) | Opening gate | Load capacity | Weight |
|------------|----------|--------------------|--------------|---------------|--------|
| 400000SH00 | Steel | 56 x 131 mm | Ø 18 mm | 25 kN | 238 g |

Features:

Termination connector (class T)

- Self-closing connector designed to allow the fixing as an element of a sub-system in such a way that the loading is in a predetermined direction.
- · Galvanized steel
- Double action: Two independent movements must be carried out for the snap opening. Pressing the thenar and opening
 the catch. When you release the catch, you close. This is independent by spring loading and thus ensures that the snap
 is always fully closed.
- Temperature range of application: -40°C bis +50°C

Use:

Retractable lanyards