
# **Datasheet**



## **Double action Hook with Fall Indicator IKV 21**

according to EN362:2004



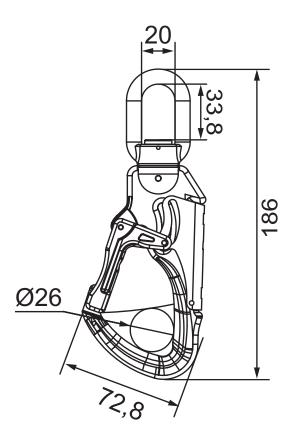

### **Product information:**

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
40000WF0224	Aluminium	72,8 x 186 mm	Ø 26 mm	28 kN	183 g

#### **Features:**

#### **Termination connector (class T)**

- Self-closing connector designed to allow the fixing as an element of a sub-system in such a way that the loading is in a predetermined direction.
- · Resistant aluminum alloy, anodized
- Double action: Two independent movements must be carried out for the snap opening. Pressing the thenar and opening
  the catch. When you release the catch, you close. This is independent by spring loading and thus ensures that the snap
  is always fully closed.
- Temperature range of application: -40°C bis +50°C

#### Use:

Retractable lanyards