


## Double action Hook IKV 28

according to EN362:2004; ANSI Z359.12-2019; CSA Z259.12-16

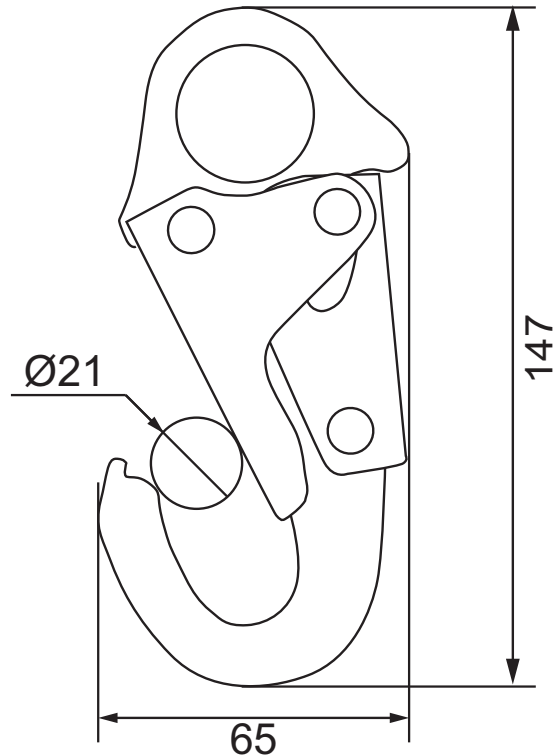

### Product information:

Order No:	Material	Connector (BxH)	Opening gate	Load capacity	Weight
40000N3610	Steel	65 x 147 mm	Ø 21 mm	23 kN	388 g

### Features:

#### Termination connector (class T)

- Self-closing connector designed to allow the fixing as an element of a sub-system in such a way that the loading is in a predetermined direction.
- Galvanized steel
- Double action: Two independent movements must be carried out for the snap opening. Pressing the thenar and opening the catch. When you release the catch, you close. This is independent by spring loading and thus ensures that the snap is always fully closed.
- Temperature range of application: -40°C bis +50°C

#### Use:

Retractable lanyards