


## Flexible HWB 2,8 DW

according to EN 360:2002



IKV 11 (EN 362:2004-T)

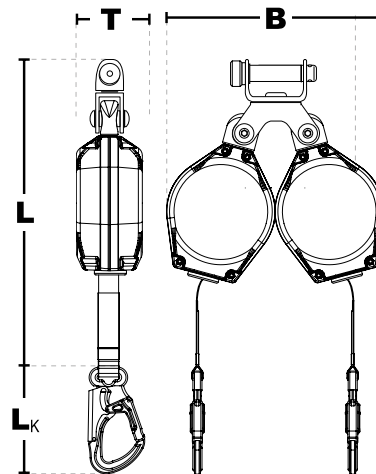

### Explanations of the device names:

- H** = Retractable type fall arrester
- W** = Swivel attachment point
- S** = Steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Insert length of the device



IKAR retractable type fall arrester have been successfully tested in a simulated fall trial over and edge according to CNB/P/11.060 ( $r \geq 0,5 \text{ mm}$ ).

## Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector ( $L_K$ ) IKV 11
41-HWB 2,8 DW	2 x 2,8 m	Aluminium	2,50 kg	425 x 170 x 70	mm136,5 mm

## Features

**Twin retractable type fall arrester to protect 1 person.**

- Sturdy and low-maintenance Retractable type fall arrester with dual swivel suspension.
- Enables reciprocal action for a secured change of work position within the guidelines of the EU regulation 2016/425.
- Robust aluminum housing with a rotational attachment eye.
- The rotatable Twinadapter TA 05 is designed for connection to a IKAR full body harness with an attachment tunnel.
- The rotatable Twinadapter prevents the twisting of the single strap and of the two webbings together.
- Lifeline made of Dyneema® webbing. The lifeline is tested over a double sharp edge.
- Standard connector IKV 11 .
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Lifespan: approx 10 years