


Flexible HWS 2,5 DW

according to FprEN360:2022



IKV 21 (EN 362:2004-T)
with fall indicator

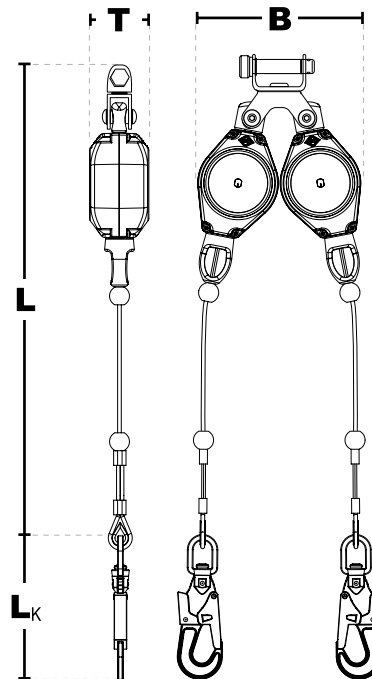

Explanations of the device names:

- H** = Retractable type fall arrester
- W** = Swivel attachment point
- S** = Steel lifeline
- B** = Webbing lifeline
- P** = Plastic housing
- Number** = Operational length of the device



IKAR retractable type fall arrester have been successfully tested in a simulated fall trial over and edge according to FprEN360:2022 ($r \geq 0,5$ mm).

Product information:

Order No:	Application length	Housing	Weight	Dimensions (LxBxT)	Connector (L _K) IKV 21
41-HWS 2,5 DW	2 x 2,5 m	Aluminium	3,20 kg	703 x 196 x 73 mm	185,5 mm

Features

Twin retractable type fall arrester to protect 1 person.

- Sturdy and low-maintenance Retractable type fall arrester with dual swivel suspension.
- Enables reciprocal action for a secured change of work position within the guidelines of the EU regulation 2016/425.
- The rotatable Twinadapter TA 05 is designed for connection to a IKAR full body harness with an attachment tunnel.
- Robust aluminum housing with a rotational attachment eye.
- Dual swivel suspension prevents the twisting of the single lifeline and of the two galvanized steel lifelines together.
- Lifeline made of galvanized steel Ø 4,8 mm.
- Standard connector IKV 21 with swivel attachment, which prevents twisting of the galvanized steel lifeline.
- Nominal load: 136 kg
- Temperature range of application: -40°C bis +50°C
- Lifespan: approx 10 years